
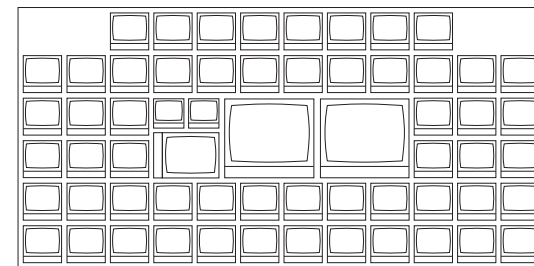
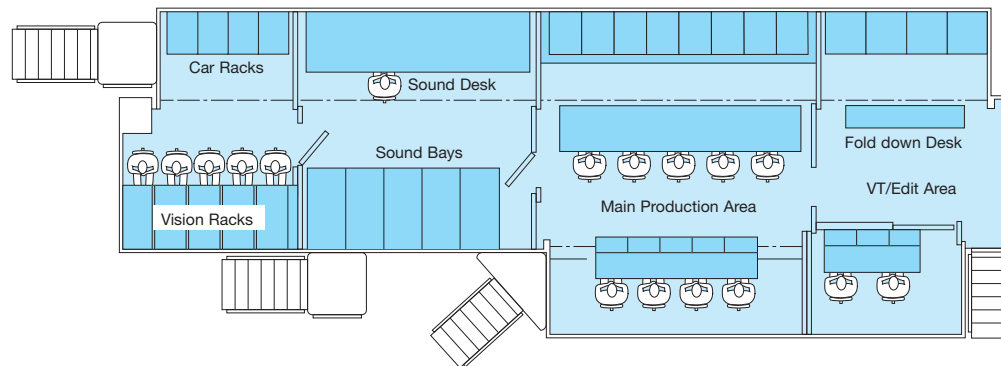


HD5

NEP Visions has one of Europe's most extensive fleets of OB trucks and TV camera equipment providing the latest in technical standards including high definition, standard definition PAL and NTSC. Visions has a highly skilled core staff of Unit Managers, Vision/Audio Engineers, Cameramen and Cable Riggers and offers clients the choice of fully crewing events or supplying guarantee staff only. Together with a range of lightweight, fast assembly fly-pack kits, NEP Visions can provide clients with continuity of facilities and crew at any televised event anywhere in the world.

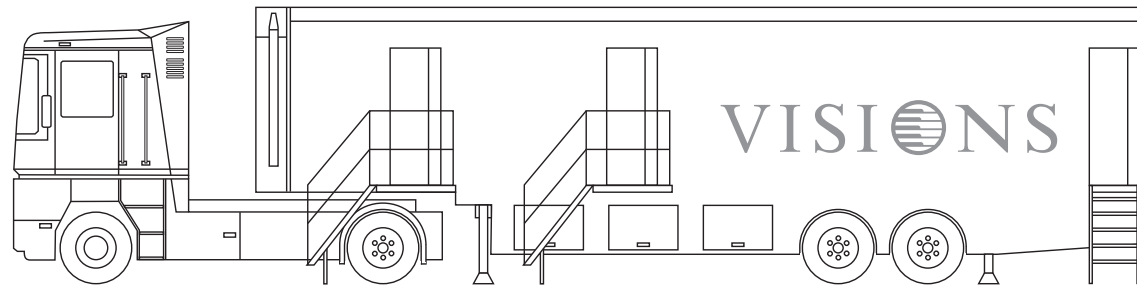

Monitor Stack

Updated August 2010

HD5

HD5 offers flexibility and versatility within a spacious and comfortable operating environment. This large double expanding unit provides a longitudinal production gallery capable of accommodating up to 10 production personnel. With an integrated VTR and edit area capable of handling up to 10 VTR's plus full 5.1 Dolby E surround sound this unit is ideal for all types of productions whether in sports, music or light entertainment.

Vision Mixer

GVG Kalypso Duo
60 assignable inputs
Quad downstream keyers
15 aux busses and full E-Mem
3 Channels of DVE built in

Graphics

Aston Ethos or other as required up to 4 machines

Router

HD Trinx 128 x 128
128 x 128 SD Quartz
Audio 128 x 128 router

Cameras

Up to 24 HD Cameras Philips LDK6000/8000 or Sony HDC1500
All cameras are 16 x 9 switchable

Lenses

Comprehensive selection subject to quotation

Production Area

Monitor wall is based on 56 x Grade 1 14" monitors
2 x 24" HD, 1 x 20", 2 x 10" SD
Monitor production rear desk,
12" monitors LCD talk back panel

VTR

Capable of 10 slots and 6 EVS

Audio

Calrec Alpha console
64 Faders
4 x 5.1 Outputs
48 Multitrack sends
20 Aux
MADI
80 NMC Amps
48 Line Inputs
112 x Line o/p
112 x AES input/outputs
Spot On
CD Player
4 x Dolby E Encoders
4 x Dolby PLII Encoders
11 x Dolby E Decoders
Embedded Audio
128 x 128 Audio Router
96 AES, 32 Analogue

Communications

RTS Telex 80 x80 Digital Matrix DBX
TIFFS
2 Wire available
8 x powered IFB's
Internal PBX Telephone Exchange
4 x RF Base Stations

Specification

Record/Replay

Up to 18 VTR/VDRs of which 8 can be multi-channel devices
32 - colour 10" preview monitors

Power

Either: 3 x 125A single phase cee-form: or
1 x 125A 3 phase cee-form

Dimensions

Length 55'2" (16.8m) whole unit
Length 44'8" (13.6m) trailer only
Height 13'6" (4.1m)
Width 8'0" (2.44m) unextended
Width 16'2" (4.94m) extended

Weight

30,200 kilos